



BS 2151 LT / BS 2670 MT / BS 2870 MT

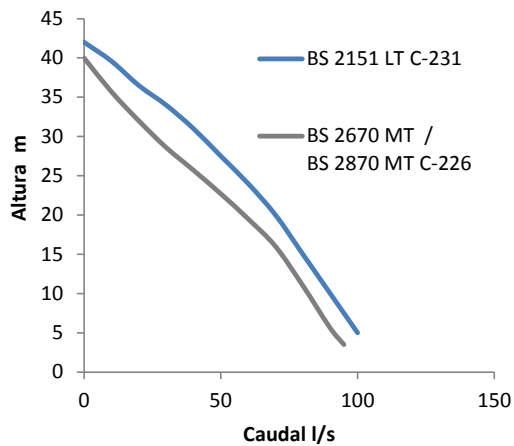

Características	BS 2151 LT C-231	BS 2670 MT	BS 2870 MT C-226
PN del motor (kW):	20,0	18,0	18,0
Tensão (V/fases)	380, 3	400, 3	400, 3
Corriente nominal IN (Amp):	36	32	32
Diâmetro mangueira:	150 mm	150 mm	150 mm
Peso kg:	165	141	141
A (mm) x D (mm)	930 x 640	955 x 395	991 x 500
Passagem de sólidos (mm)	10 x 42	10	10
pH da água	5 - 8	5 - 8	5 - 8

BS 2151 / BS2670 / BS 2870 HT

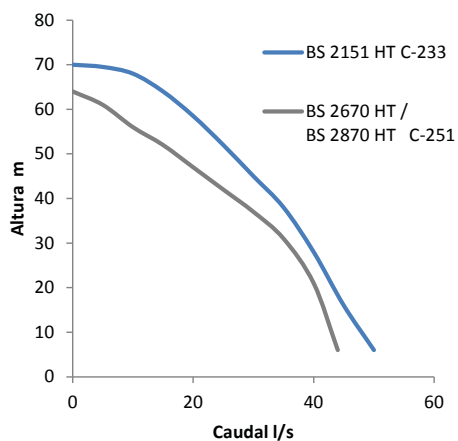

Características	BS 2151 HT C-233	BS 2670 HT C-251	BS 2870 HT C-251
PN do motor (kW):	20,0	18,0	18,0
Tensão (V/fases)	380, 3	400, 3	400, 3
Corriente nominal IN (Amp):	36	32	32
Diâmetro mangueira:	150 mm	150 mm	150 mm
Peso kg:	165	141	141
A (mm) x D (mm)	930 x 640	955 x 395	991 x 500
Passagem de sólidos (mm)	10 x 42	10	10
pH da água	5 - 8	5 - 8	5 - 8